

9/pats  
JC20 Rec'd PCT/PTO 14 SEP 2009

## TITLE

"APPARATUS AND METHOD FOR CAUSING PAPER WEBS TO TEAR OFF  
WITHIN REWINDING MACHINES"

## SPECIFICATION

5 The present invention refers to an apparatus and method for causing paper webs to tear off within rewinding machines. The production of logs is known to imply feeding a continuous web of paper along a predetermined path. At a given point of said path, a discontinuous transverse cut is operated on the  
10 web in order to subdivide it into sections or sheets of preset length which can be torn off.

This procedure comprises using tubular cardboard elements (commonly said "cores") on the surface of which a preset amount of glue is spread to allow gluing the first sheet of  
15 the log to be formed. The said procedure also provides for using winding rollers which drive into rotation the core on which the paper is wound. The log-forming process ends up when a preset amount of paper has been wound on the core. At this point, the formation of the next log begins. At the end  
20 of the formation process, it is necessary to glue the last sheet of each log on the underlying sheet to avoid the spontaneous unwinding of the same log. This type of gluing is defined as "edge closing". When a number of preset sheets result wound up on the log in the course of formation, the  
25 paper web is cut off, that is, the last sheet of the log in the course of formation is separated from the first sheet of the next log to be formed.

Patents EP 524158, GB 210568 and EP 694020 disclose devices used to cause the paper web to tear off at the end of the  
30 formation of the logs.

Such devices, however, result unsuited for the present production requirements, as they are relatively unreliable or require frequent and costly service interventions.

The main object of the present invention is to overcome, or  
35 at least greatly reduce, the above drawbacks.

This result has been achieved, according to the invention, by adopting the idea of making an apparatus and applying a method having the characteristics indicated in the independent claims. Further characteristics being set forth  
5 in the dependent claims.

The advantages deriving from the present invention lie essentially in the fact that it is possible to ensure all the time the highest accuracy in causing the paper to tear off whatever the feeding speed, by eliminating abrupt movements  
10 and consequent vibrations that are likely to endanger the proper operation of the system; that an apparatus according to the invention is relatively easy to make, cost-effective as far as the maintenance is concerned, and reliable even after a prolonged service life.

15 These and other advantages and characteristics of the invention will be best understood by anyone skilled in the art from a reading of the following description in conjunction with the attached drawings given as a practical exemplification of the invention, but not to be considered in  
20 a limitative sense, wherein:

- Figs. 1 and 2 show a rewinding machine provided with an apparatus according to the invention, in two possible embodiments thereof;

- Figs. 3 and 4 are enlarged details of Figs. 1 and 2,  
25 respectively, which illustrate schematically the step of tearing the paper web;

- Fig. 5A shows schematically in longitudinal section view, a first exemplary embodiment of a tear-off apparatus, according to the invention, which operates according to the layout of  
30 Figs. 1 and 3;

- Fig. 5C shows schematically a partial side view of the tubular jacket of the apparatus shown in Fig. 5A;

- Fig. 5D is a schematic cross-section view of the tubular jacket shown in Fig. 5C;

- Fig. 6A is a schematic longitudinal section view of a  
35

second exemplary embodiment of an apparatus, according to the invention, which operates according to the layouts of Figs. 2 and 4;

- Fig. 6B is a partial side view of the external roller of the apparatus of Fig. 6A;
- Fig. 6C is a schematic side view in cross-section of the apparatus of Fig. 6A;
- Fig. 6D shows an enlarged detail of the drawing of Fig. 6C; and
- Fig. 7 is a block diagram of the system for operating the devices illustrated in the preceding figures.

An apparatus according to the invention can be used within a rewinder of any possible construction, as far as the feeding and gluing of the cores (1) and paper webs (2) being used for the production of logs are concerned. Rewinding machines are known to those skilled in the art and, therefore, will not be described herein in details. Patents US 4487377, EP 524158, GB 2105688, US 5979818 and EP 694020 describe as many examples of embodiments of rewinding machines, so that, reference can be made thereto for a broader description of this type of machines. Essentially, and in the same way as illustrated in Figs. 1 and 2 of the attached drawings, they comprise:

- a station (A) for feeding the cores (1);
- a store (M) for the cores (1),
- means for feeding and transversally perforating a paper web (2), with the use of a plurality of feeding, driving-out, and cutting rollers (R1, R2, R3, RA) disposed along a predetermined path;
- means for wrapping up the paper (2) onto the cores (1), with the use of a set of winding rollers (RA, R4, R5) two of which (R4, R5) being disposed one above the other at the outlet of a channel (C) delimited in part by a fixed guide consisting of two elements (3a, 3b), in part by a loop-closed conveyor belt (300), and in part by a roller (RA) which

contributes both to the supply of paper (2) and the winding of the latter onto the cores (1) (differently from the rollers which contribute only to the feeding and transverse perforation of the web 2);

5 - pusher means (6) rotating about respective axes (60) disposed along the said channel (C) for cooperating to the transfer of cores (1) from the store (M), that is, from the inlet station (A), to the first length (3a, 300) of channel (C), and to the transfer of the same cores from the first  
10 length of channel (C) to the second length (delimited by the guide element 3b and by the roller RA);

- means (not shown for the sake of simplicity in the figures of the attached drawings) for the gluing of the paper web (2) and cores (1) to cause the first sheet of each log (RO) to  
15 adhere on the corresponding core, and the last sheet of each log (RO) to adhere on the underlying paper.

With a procedure known to those skilled in the art, the web (2) unwinds along the delimited path from the rollers (R1, R2, R3, RA) and winds up onto the core (1r) in the station  
20 where the rollers (R4) and (R5) are positioned and, in cooperation with the roller (RA) and by rotating about the respective longitudinal axes, cause the paper (2) to wind up onto the core (1r). When a preset number of sheets (each of which being delimited by two consecutive transverse  
25 perforations of web 2) are wound up on said core, means are made to act for causing a tear of the web (2) at a site of the channel (C) located between a fresh core (1), being introduced into the same channel (C), and the station for the formation of logs (RO) wherein the rollers (R4, R5) operate.  
30 The tear is carried out in correspondence of a perforation line (p) which separates the last sheet of the log (RO) in the course of formation from the first sheet of the next log to be formed. Afterwards, the roller (R4), which is mounted on a rotating arm (400) associated with a corresponding  
35 actuator (401), is moved away from the underlying roller (R5)

to release the log (RO) and making it to move away along an escape plane downstream (402). At this point, the core (1) which, while the formation of the log (RO) is being completed, moves forward and rolls along the channel (C) owing to the contact thereof with the roller (RA), the same core takes up the place of the preceding one and the cycle is identically repeated.

It is understood, however, that in view of the object of the present invention, the said feeding, perforation, gluing and unloading means may be shaped and disposed in any way.

Advantageously, according to the invention, to cause a tearing of the web (2) in correspondence of the transit of a perforation line (p) which separates the last sheet of the log (RO) in the course of formation from the first sheet of the next log to be formed, means (SP) are provided able to direct a jet of compressed air toward the said line (p) thereby causing - with the possible cooperation of the roller (R4) which, in a previous step, may be accelerated to stretch the web (2) in the region interested by the jet - the tearing of the web (2) in correspondence of the same line (p).

For example, reference being made to Figs. 1, 3, 5A-5D of the attached drawings, the said pneumatic means (SP) comprise a set of nozzles (7) associated, via corresponding solenoid valves (70), with a reservoir of compressed air (71): the said nozzles (7), together with the respective solenoid valves (70) and reservoir (71) being positioned inside the roller (RA) whose outer surface is delimited by a tubular jacket (72) exhibiting a plurality of holes (73) through which the nozzles (7) are able to operate.

According to the example shown in Fig. 5A, the said tubular jacket (72) rotates about its longitudinal axis while the said reservoir (71) is fixed and coaxial to the same jacket (72).

To this end, as illustrated in Fig. 5A, the said jacket (72) is provided with a shaft (8) with flanged head (87), which

shaft is supported by the stationary part (80) of the machine with the interposition of a bearing (81), and is associated with a corresponding driving means (not shown).

Internally, the said flange (87) has a seat for a conical casing (82) inside which an axial extension of the reservoir (71) is housed with the interposition of a corresponding bearing (83).

On the opposite side, the reservoir (71) is solid to a stationary part (84) of the machine and has a sleeve (85) positioned thereon, the latter having the jacket (72) coaxially mounted thereon with the interposition of a corresponding bearing (86).

In the drawing of Fig. 5A, the reference numbers (74) and (75) designate, respectively, the power cables for the solenoid valves (70) and a pipe for the introduction of air into the reservoir (71).

The solenoid valves (70) are activated to allow a flow of compressed air from the reservoir (71) through the nozzles (7), upon the transit of a perforation line (p) - separating the last sheet of the log in the course of formation from the first sheet of the next log to be formed - which takes place when the cutting rollers (R2) reach a preset number of revolutions or fraction of a revolution, for example. The consequent tearing action is rapid and accurate. The checking of the number of revolutions of the cutting rollers (R2) may be operated by means of a counter device (100) mounted on the axis of one of the same rollers (R2) in a manner known per se.

As shown in Fig. 7, the activation of said solenoid valves (70) can be automated by means of a programmable electronic unit (UE) which, via the cables (700), sends electrical signals for the activation, respectively, the deactivation of the solenoid valves (70) in response to electrical signals coming from the control device (100) such as an encoder, for example. The said unit (UE) is of a type known to those

skilled in the industrial automation field and, therefore, will not be described in greater detail.

As above mentioned, before delivering the air flow through the nozzles (7), the roller (R4) may be accelerated in order  
5 to stretch the web (2) in the region interested by the action of the nozzles (7).

Advantageously, as illustrated in Figs. 5A and 5B of the attached drawings, the nozzles (7) located inside the roller (RA) can be oriented radially to the roller (RA).

10 Alternatively, as illustrated in Figs. 2, 4 and 6A-6D of the attached drawings, the said nozzles (7) can be positioned externally to the roller (RA), oriented and directed toward a region between the roller (RA) and the logs (RO)-forming station wherein the winding rollers (R4, R5) are made to  
15 operate.

To this end, the roller (RA) may be shaped in such a way as to exhibit a plurality of circumferential grooves (76) wherein the extended and correspondingly curved bodies of the nozzles (7) are positioned, the latter being associated with  
20 the reservoir (71) located outside and above the roller (RA). In this example, the roller (RA) has the two ends of the shaft (8) supported by stationary parts (80) of the machine with the interposition of corresponding bearings (81), two head flanges (87) corresponding to said stationary parts  
25 solid to both sides of the reservoir (71).

The operation of the device according to the above illustrated example is identical to that previously described.

An operating method according to the invention comprises, therefore, a step for feeding a continuous paper web (2) to a  
30 station in which the formation of a log (RO) takes place, the said web (2) being provided with transverse pre-cutting or perforations at regular intervals, and implies interrupting the continuity of the web at a predetermined moment by means  
35 of a jet of fluid such as compressed air, for example,

directed toward a perforation or pre-cutting line (p) of the web (2).

According to the present method, the said step for the delivery of a jet of fluid may be operated subsequently to a  
5 step for the acceleration of roller (R4) which acts on logs (RO) at a log-forming station.

Practically, the construction details may vary in any equivalent way as far as the shape, dimensions, elements disposition, nature of the used materials are concerned,  
10 without nevertheless departing from the scope of the adopted solution idea and, thereby, remaining within the limits of the protection granted to the present patent.



## CLAIMS

1) Apparatus for causing paper webs to tear off within rewinding machines, the said web (2) being provided, at regular intervals, with transverse perforation lines which  
5     subdivide the web into sheets joined to each other but able to be separated in correspondence of said perforation lines, the apparatus comprising means to cause the tearing of the web (2) upon the passage of a perforation line (p) which  
10     separates the last sheet of a log (R0) in the course of formation from the first sheet of the next log to be formed, characterized in that the said tearing means are of pneumatic type (SP) able to direct a jet of compressed air toward the said line (p).

2) Apparatus according to claim 1, characterized in that the  
15     said pneumatic means (SP) comprise a set of nozzles (7) associated, via corresponding solenoid valves (70), with a reservoir of compressed air (71): the said nozzles (7), with the respective solenoid valves (70) and the reservoir (71) being positioned internally to a web (2)-feeding roller (RA)  
20     whose outer surface is delimited by a tubular jacket (72) provided with a plurality of openings (73) through which the nozzles (7) are allowed to act.

3) Apparatus according to claims 1 and 2, characterized in that the said tubular jacket (72) rotates about its  
25     longitudinal axis while said reservoir (71) is stationary.

4) Apparatus according to claims 1 and 2, characterized in that the said tubular jacket (72) is fixed to the driving shaft (8) of the roller (RA) by means of a flange (87) and is supported, on the side of the driving shaft (7), by a  
30     stationary part (80) with the interposition of a bearing (81), the said flange (87) exhibiting a seat for a conical casing (82) inside which an axial extension of the reservoir (71) is located, the said reservoir (71) being solid, on the opposite side, to a stationary part (84) and having a sleeve  
35     (85) positioned thereon on which the jacket (72) is mounted

with the interposition of a corresponding bearing (86).

5) Apparatus according to claim 1, characterized in that the said pneumatic means (SP) comprise a set of nozzles (7) associated, by means of corresponding solenoid valves (70),  
5 with a reservoir of compressed air (71): the said nozzles (7), with the respective solenoid valves and reservoir (71) being positioned externally to a web (2)-feeding roller (RA) whose outer surface is provided with a plurality of circumferential grooves (76) in correspondence of which the  
10 nozzles (7) are positioned.

6) Method for causing paper webs to tear off within rewinding machines, comprising a step for feeding a continuous paper web (2) to a station in which the formation of a log (RO) takes place, the said web (2) being provided with transverse  
15 pre-cutting or perforation lines at regular intervals, characterized in that it includes interrupting the continuity of the web at a predetermined instant by the impact of a jet of fluid onto the web (2), the jet being directed toward a perforation line (p) of the web (2) which separates the last  
20 sheet of a log (RO) in the course of formation from the first sheet of the next log to be formed.

7) Method according to claim 6, characterized in that the said step for delivering a fluid jet is operated subsequently to a step for the stretching of the web (2) in the region  
25 interested by said jet.

8) Method according to claim 6, characterized in that the said fluid jet is directed from a roller (RA) of the web (2)-feeding system to the said line (p).

CLAIMS (AMENDED) 1020 Rec'd PCT/PTO 1 4 SEP 2009

- 1) Apparatus for causing paper webs to tear off within rewinding machines, the said web (2) being provided, at regular intervals, with transverse perforation lines which subdivide the web into sheets joined to each other but able to be separated in correspondence of said perforation lines, the apparatus comprising means to cause the tearing of the web (2) upon the passage of a perforation line (p) which separates the last sheet of a log (RO) in the course of formation from the first sheet of the next log to be formed, wherein said tearing means are of pneumatic type (SP) able to direct a jet of compressed air toward the said line (p), wherein said pneumatic means (SP) comprise a set of nozzles (7) associated, via corresponding solenoid valves (70), with a reservoir of compressed air (71), the said nozzles (7), with the respective solenoid valves (70) and the reservoir (71) being positioned internally to a web (2)-feeding roller (RA) whose outer surface is delimited by a tubular jacket (72) provided with a plurality of openings (73) through which the nozzles (7) are allowed to act, characterized in that said tubular jacket (72) rotates about its longitudinal axis while said reservoir (71) is stationary.
- 2) Apparatus according to claim 1, characterized in that the said tubular jacket (72) is fixed to the driving shaft (8) of the roller (RA) by means of a flange (87) and is supported, on the side of the driving shaft (7), by a stationary part (80) with the interposition of a bearing (81), the said flange (87) exhibiting a seat for a conical casing (82) inside which an axial extension of the reservoir (71) is located, the said reservoir (71) being solid, on the opposite side, to a stationary part (84) and having a sleeve (85) positioned thereon on which the jacket (72) is mounted with the interposition of a

corresponding bearing (86).

- 3) Apparatus for causing paper webs to tear off within rewinding machines, the said web (2) being provided, at regular intervals, with transverse perforation lines which subdivide the web into sheets joined to each other but able to be separated in correspondence of said perforation lines, the apparatus comprising means to cause the tearing of the web (2) upon the passage of a perforation line (p) which separates the last sheet of a log (RO) in the course of formation from the first sheet of the next log to be formed, wherein said tearing means are of pneumatic type (SP) able to direct a jet of compressed air toward the said line (p), wherein said pneumatic means (SP) comprise a set of nozzles (7) associated, via corresponding solenoid valves (70), with a reservoir of compressed air (71), characterized in that the said pneumatic means (SP) comprise a set of nozzles (7) associated, by means of corresponding solenoid valves (70), with a reservoir of compressed air (71); the said nozzles (7), with the respective solenoid valves and reservoir (71) ~~(being)~~ positioned externally to a web (2) - *<are>* feeding roller (RA) whose outer surface is provided with a plurality of circumferential grooves (76) in correspondence of which the nozzles (7) are positioned.
- 4) Method for causing paper webs to tear off within rewinding machines, comprising a step for feeding a continuous paper web (2) to a station in which the formation of a log (RO) takes place, the said web (2) being provided with transverse pre-cutting or perforation lines at regular intervals, comprising the step of interrupting the continuity of the web at a predetermined instant by the impact of a jet of fluid onto the web (2), the jet being directed toward a perforation line (p) of the web (2) which separates the last sheet of a log (RO) in the course of formation from the first sheet of the

next log to be formed, characterized in that the said step for delivering a fluid jet is operated subsequently to a step for the stretching of the web (2) in the region interested by said jet.

- 5 5) Method according to claim 4, characterized in that the said fluid jet is directed from a roller (RA) of the web (2)-feeding system to the said line (p).

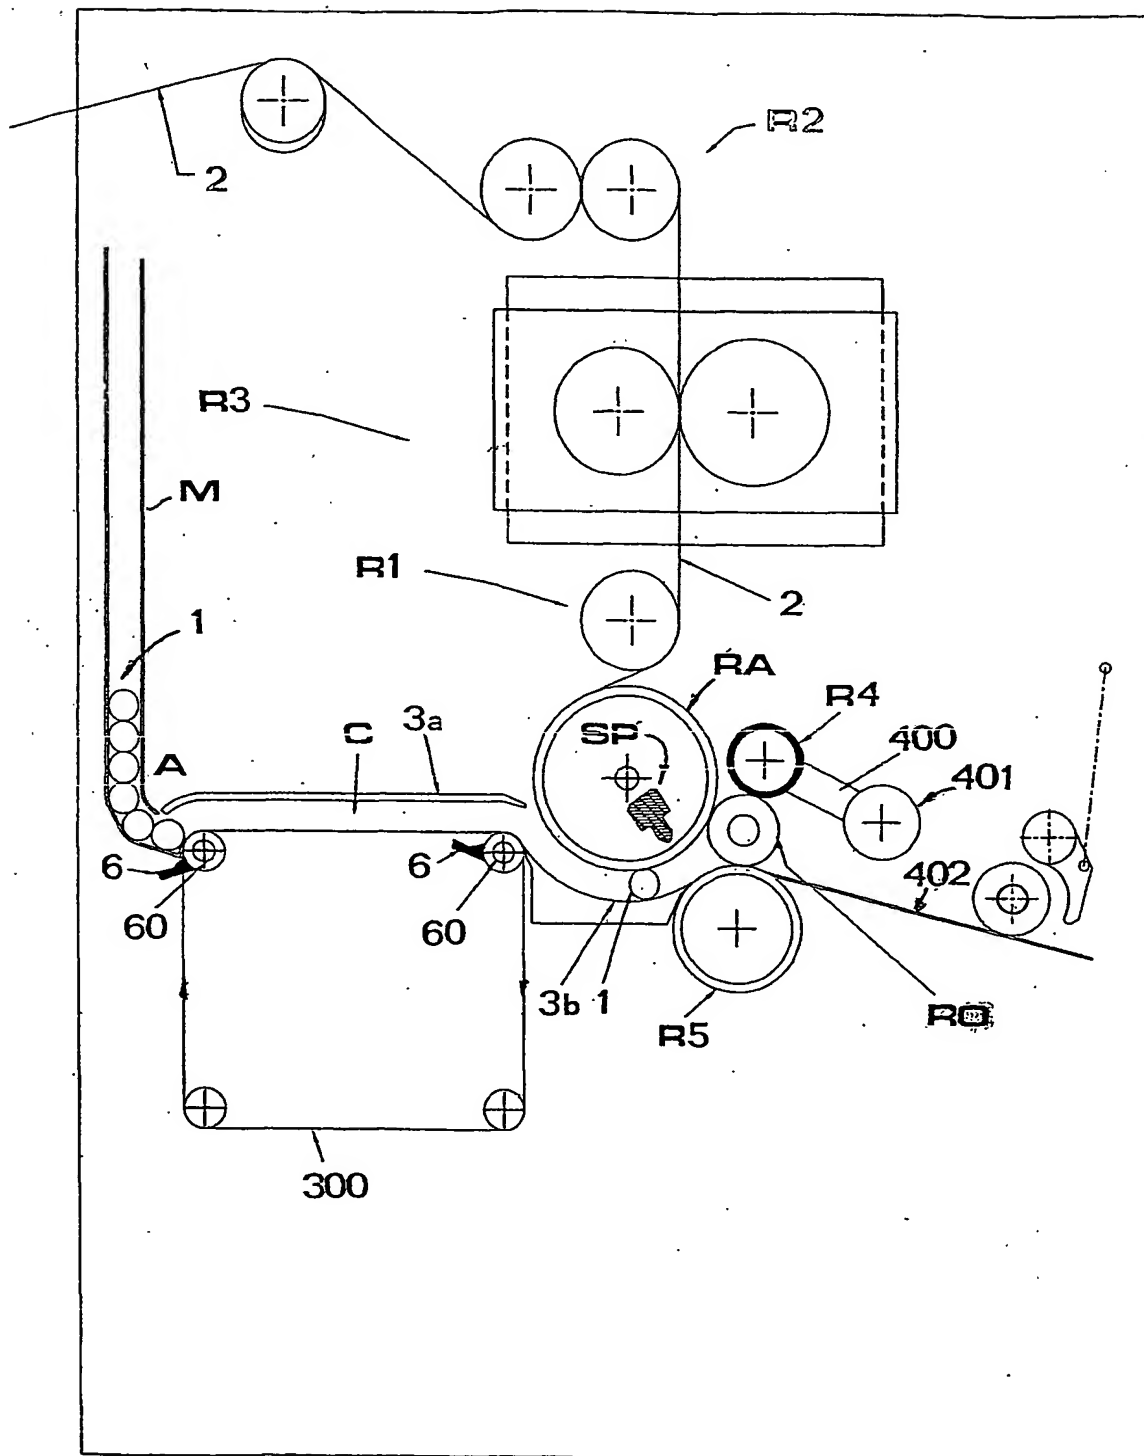


Fig. 1

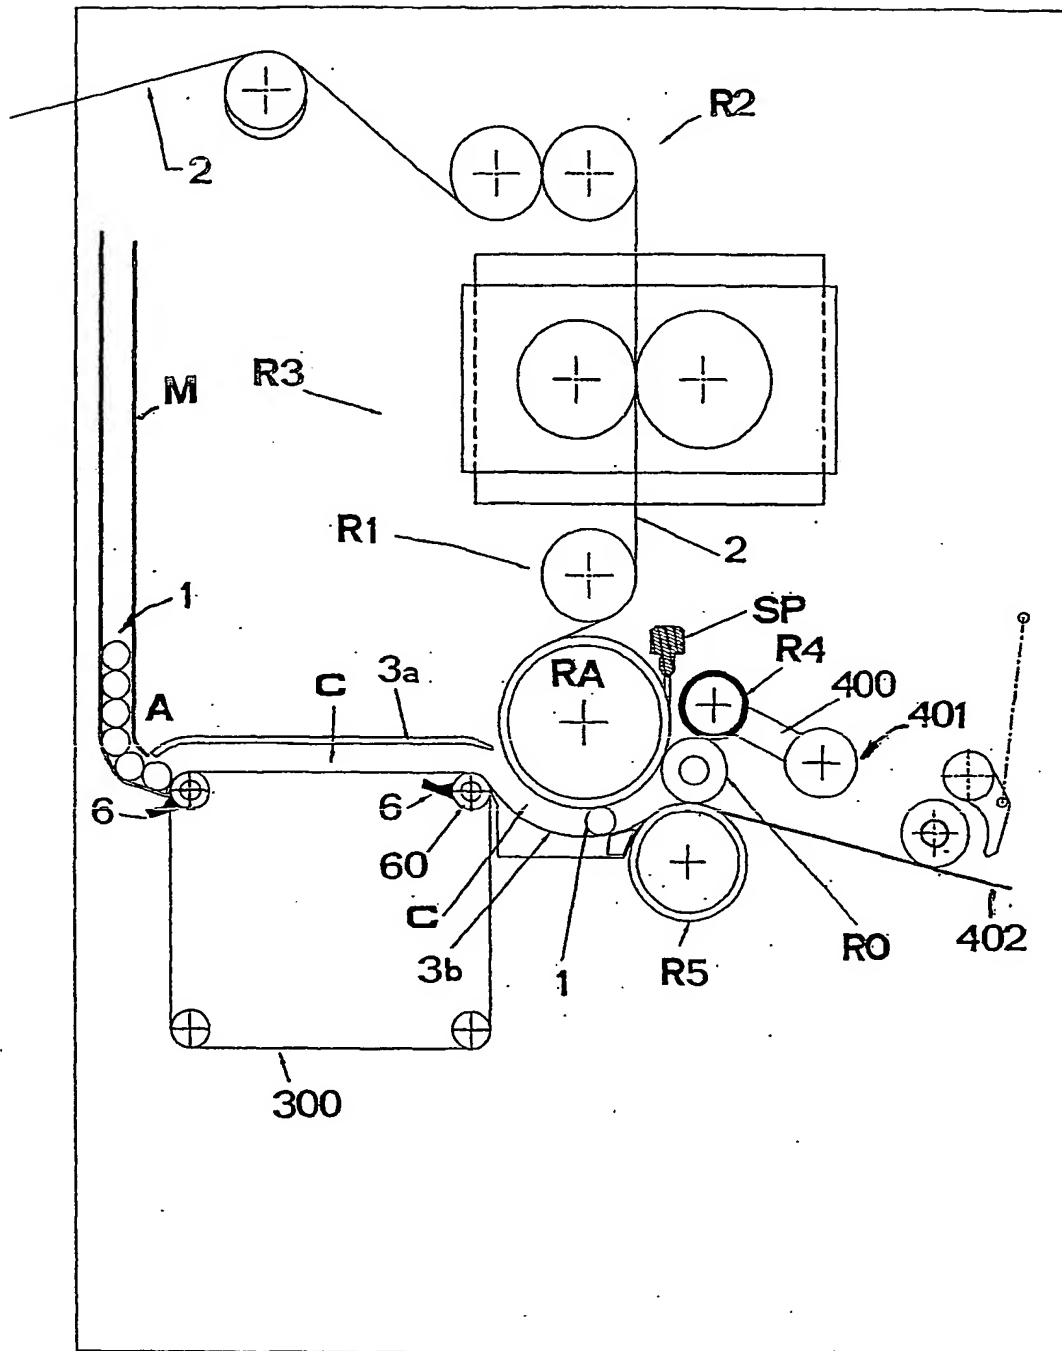


Fig. 2

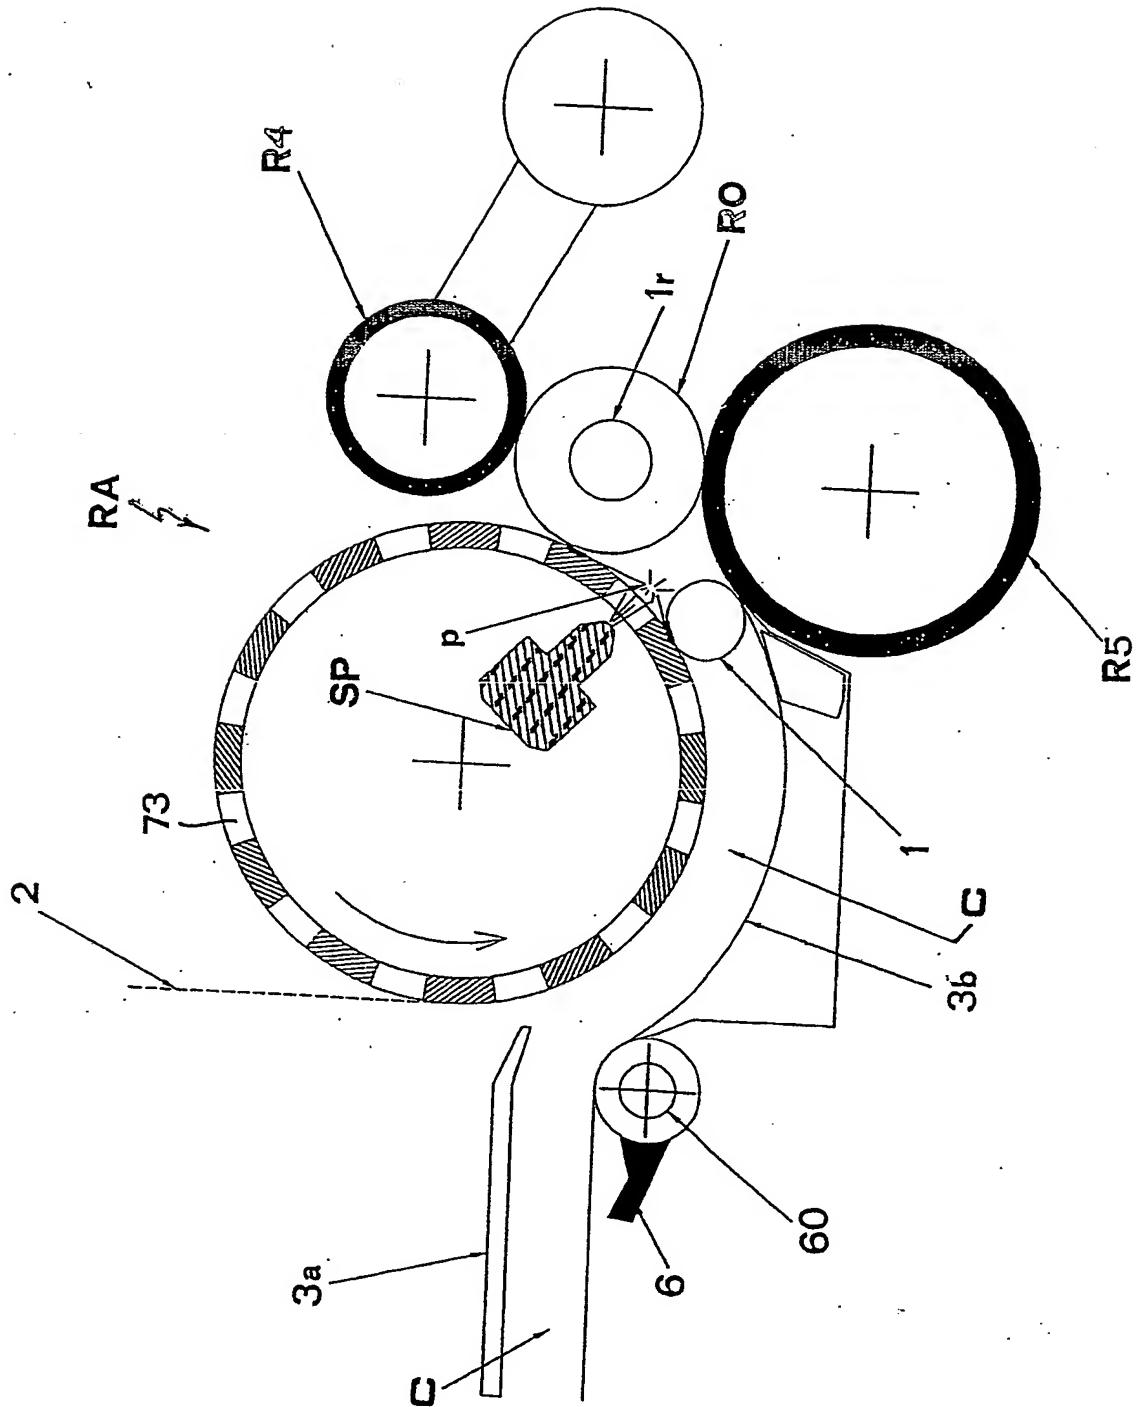


Fig. 3





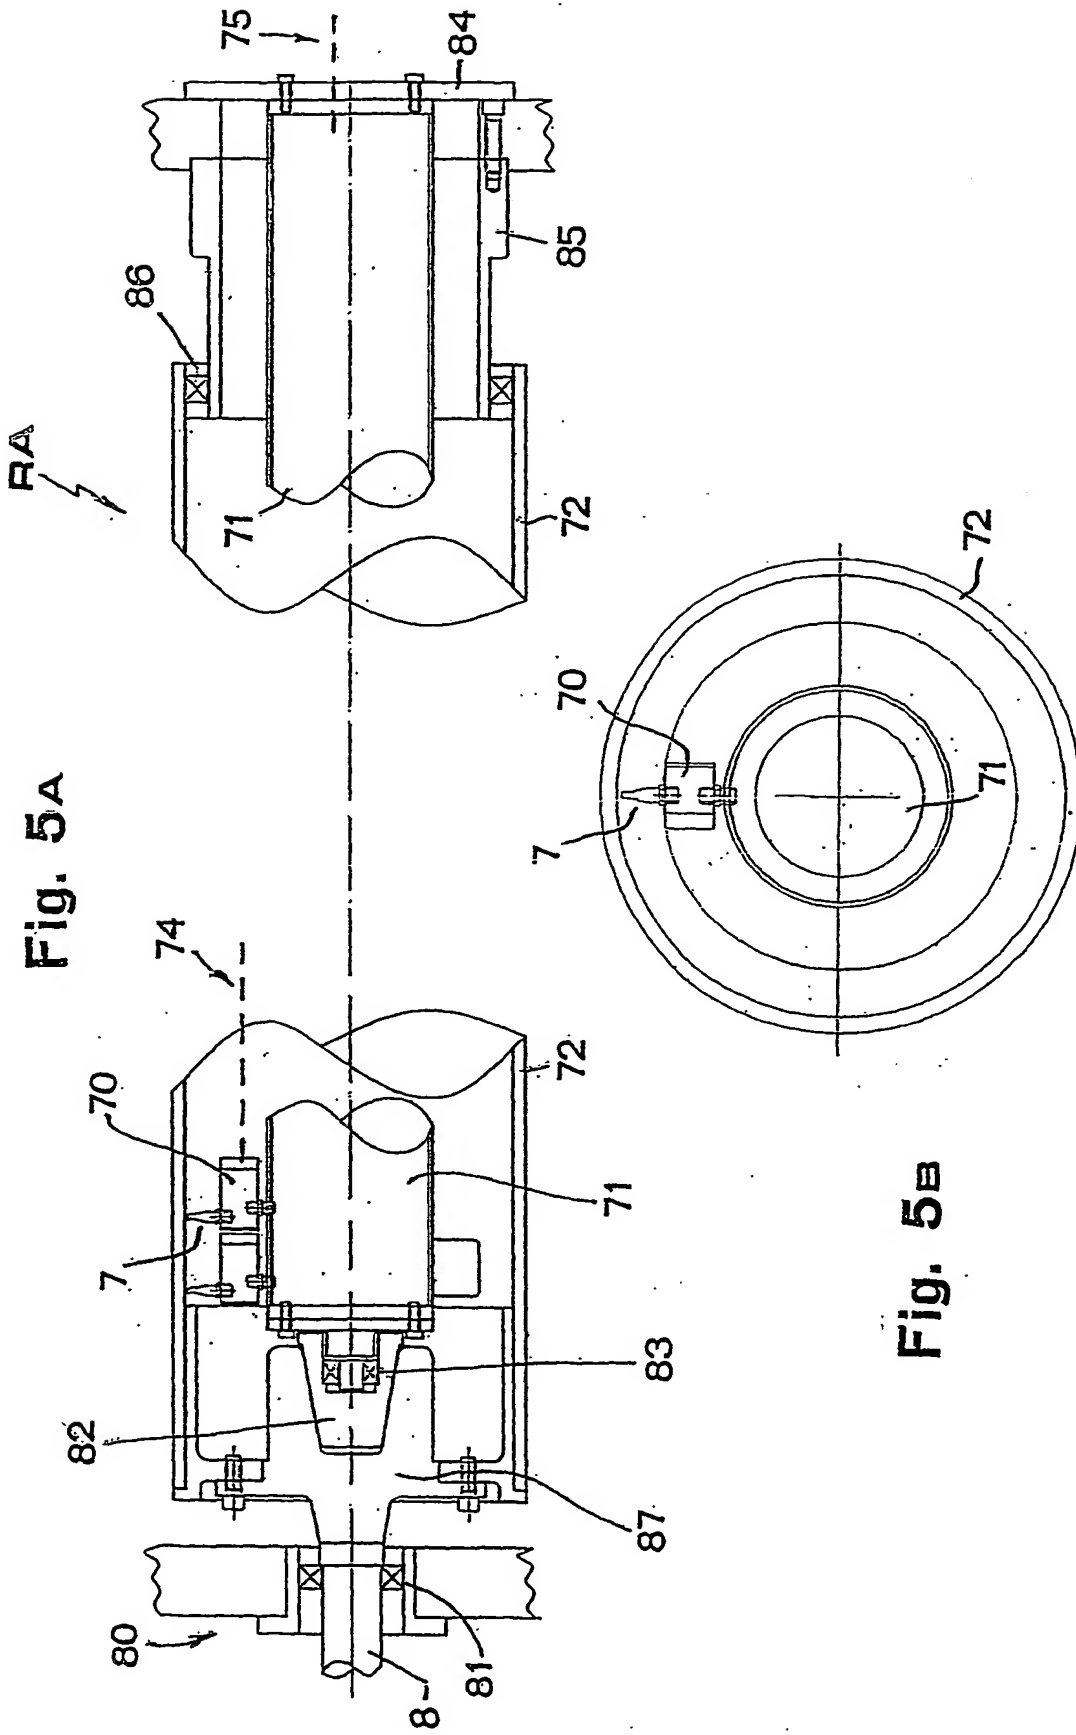


Fig. 5A

Fig. 5B

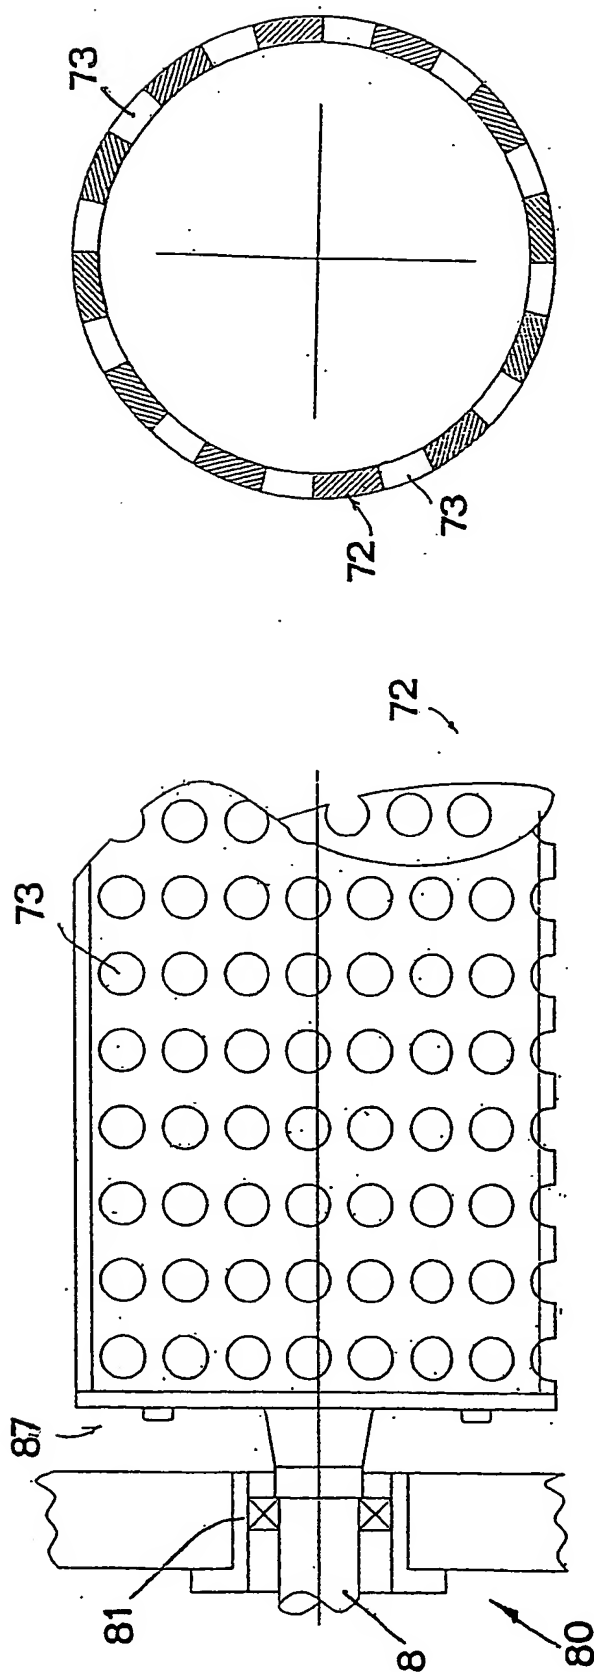



Fig. 5a

Fig. 5c



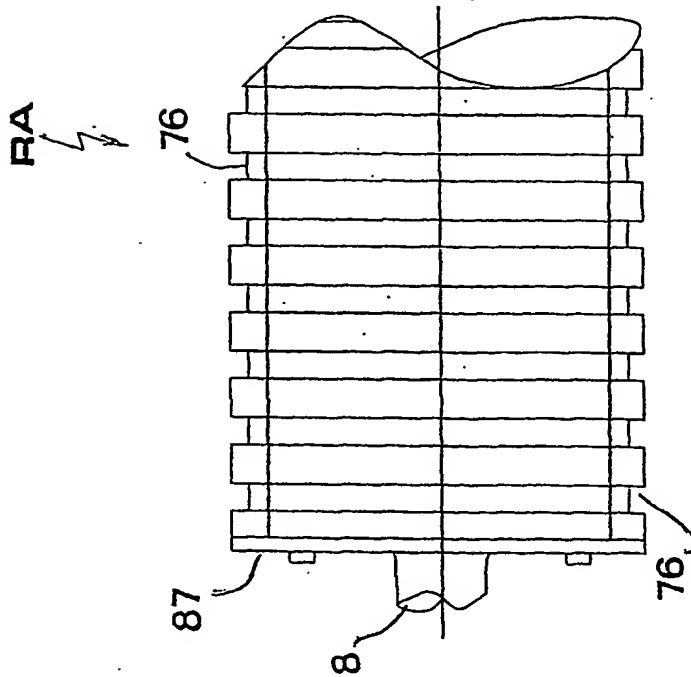


Fig. 6B

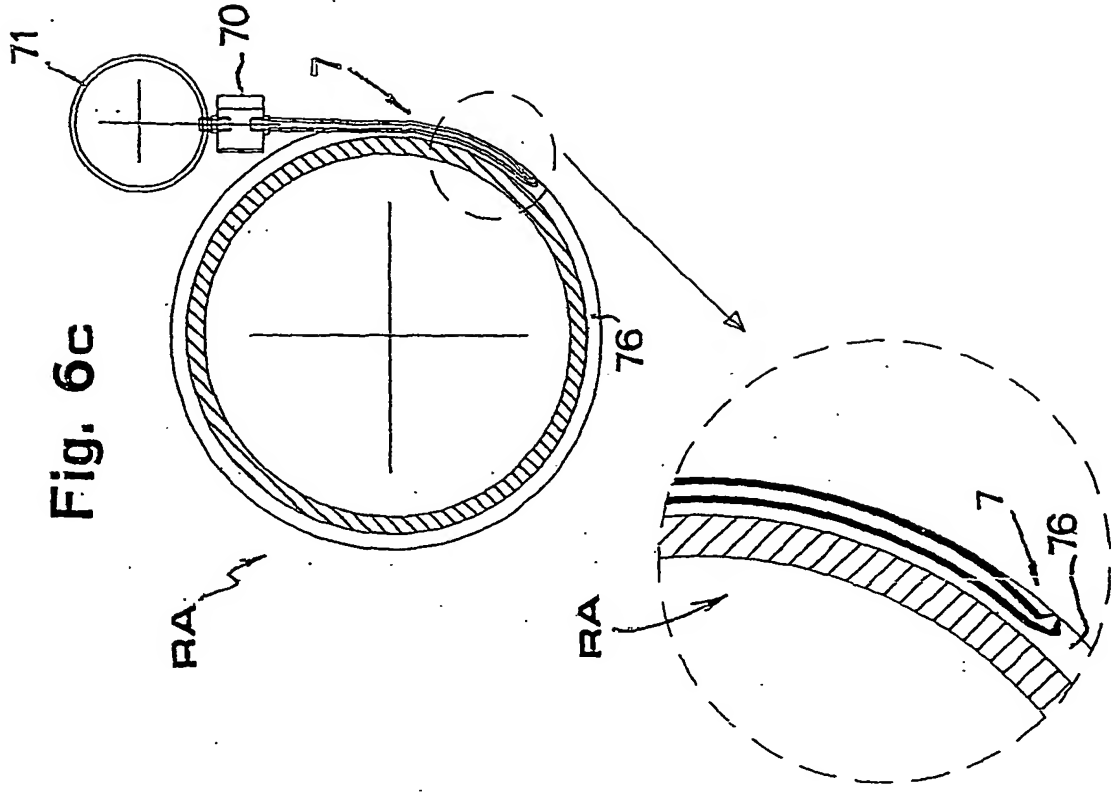


Fig. 6C

Fig. 6D

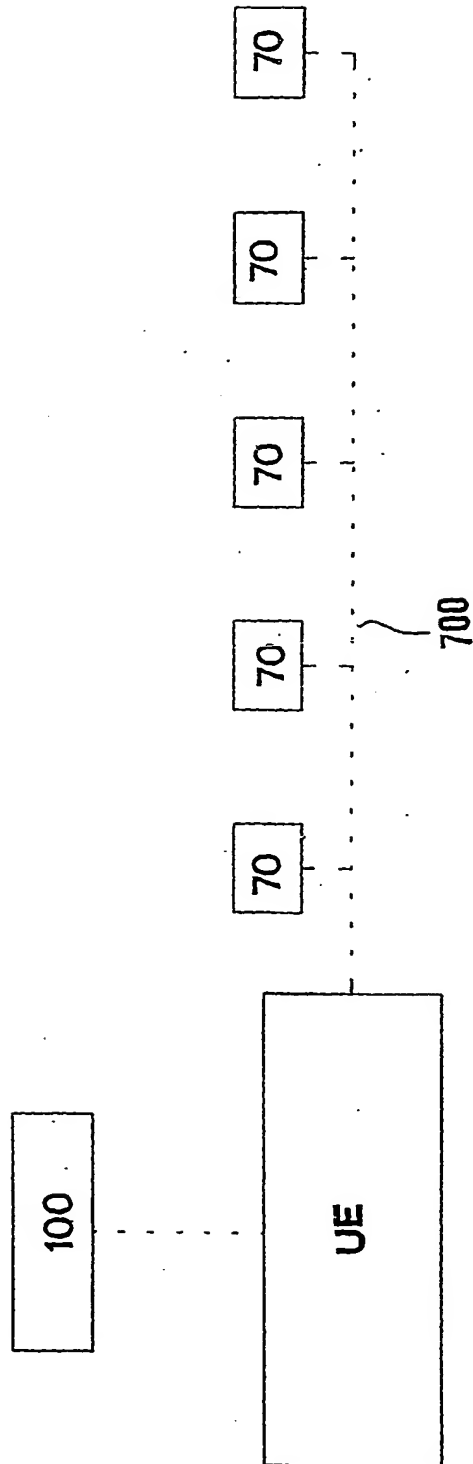


Fig. 7